


OEM Bluetooth-Serial Module, Parani™ ESD1000

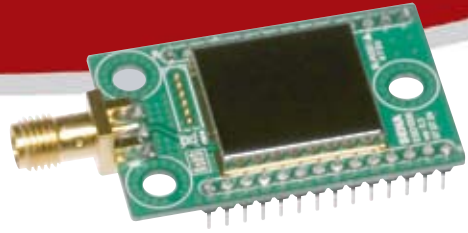

Features

- Bluetooth Specification v2.0 + EDR
- Useful for Bluetooth-enabling users' devices
- Basic Transmit Power : Max. +18dBm, EDR Transmit Power : Max. +6dBm
- Receiving Sensitivity : -88dBm(0.1%BER)
- Supports Bluetooth profiles SPP(Serial Port Profile)
- External interface for UART
- Interoperability with PDA, laptops etc.
- Supports firmware upgrade via windows-based software (ParaniUpdater)
- Working distance(In an open field) : Nom. 100 meters, up to 1000m using patch antenna
- Easy to use Windows configuration tool available.
- No external drivers required.

Parani-ESD1000 is Class1 type Embedded Bluetooth Module for users to make their devices Bluetooth-enable. By default, it supports 100 meters of wireless transmit distance. The Parani-ESD1000 has an extension option so that users can extend the transmit distance up to 1000 meters using optional antennas. It supports Bluetooth v2.0+EDR specification, and external interface UART.


Users may configure the Parani-ESD1000 by using easy-to-use Windows-based utility software or by using standard AT command set.

Typical application areas of the Parani-ESD1000 include :

- RS232 cable replacement
- Truck/Bus monitoring system
- Car Diagnostics
- Wireless POS system
- Wireless Machine(Healthcare/Industrial) monitoring
- Wireless Factory monitoring
- PLC programming
- Wireless Printing
- Wireless Logistics

Pin Assignment Information

Pin NO.	Pin Name	Direction	Description	Signal Level
1	GND	-	GROUND	GROUND
2	N/A			
3	N/A			
4	N/A			
5	BT_MODE	IN	Pairing signal	TTL
6	FACTORY RESET	IN	Factory reset signal(Active 'L')	TTL
7	LOW_BATT_INDICATOR	OUT	Low battery status(Active 'L')	TTL
8	N/A			
9	HW_RESET	IN	Hardware reset signal(Active 'L')	TTL
10	N/A			
11	N/A			
12	VCC	IN	Power(3.3V)	POWER
13	N/C			
14	GROUND	-	GROUND	GROUND
15	GROUND	-	GROUND	GROUND
16	GROUND	-	GROUND	GROUND
17	UART_DCD	OUT	UART DCD(data carrier detect)	TTL
18	UART_DSR	IN	UART DSR(data set ready)	TTL
19	UART_DTR	OUT	UART DTR(data terminal ready)	TTL
20	UART_RXD	IN	UART RXD(receive data)	TTL
21	UART_TXD	OUT	UART TXD(transmit data)	TTL
22	UART_CTS	IN	UART CTS(clear to send)	TTL
23	UART_RTS	OUT	UART RTS(ready to send)	TTL
24	N/A			
25	N/A			
26	N/A			
27	N/A			
28	GROUND	-	GROUND	GROUND

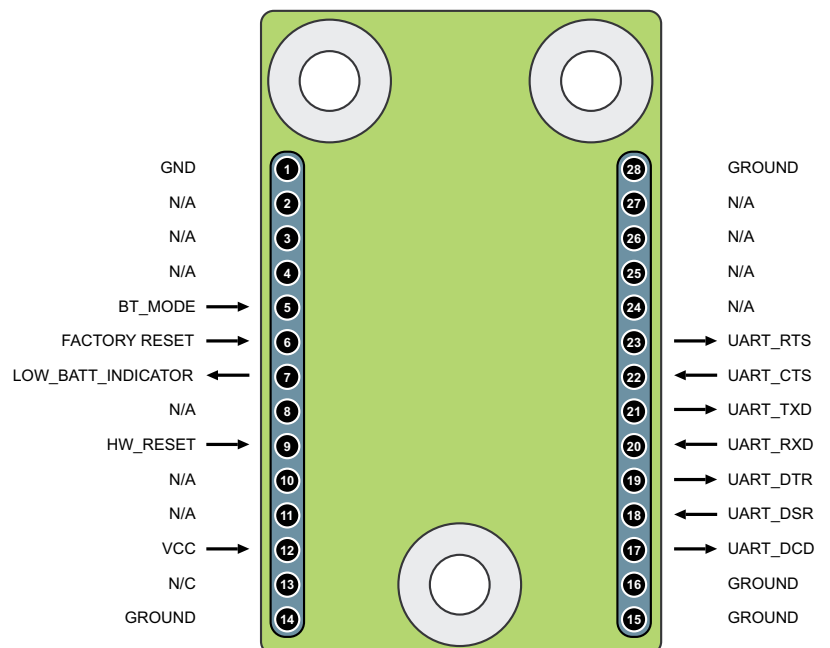

Specifications

Serial Interface

- UART
- 2mm Header 14 x 2
- Serial UART speed up to 921.6kbps
- CTS/RTS flow control, DTR/DSR for loop-back & full transfer

Bluetooth Interface

- Bluetooth v2.0 + EDR
- Class 1
- Profiles : SPP
- Working distance(in open field)

SAT-G01R	- SAT-G01R	100 meters
SAT-G01R	- DAT-G01R	150 meters
DAT-G01R	- DAT-G01R	200 meters
DAT-G01R	- DAT5-G01R	300 meters
DAT-G01R	- PAT-G01R	500 meters
DAT5-G01R	- DAT5-G01R	400 meters
DAT5-G01R	- PAT-G01R	600 meters
PAT-G01R	- PAT-G01R	1,000 meters

[Antennas]

- SAT-G01R : +1dBi Stub Antenna
- DAT-G01R : +3dBi Dipole Antenna
- DAT5-G01R : +5dBi Dipole Antenna
- PAT-G01R : +9dBi Patch Antenna

Max. Tx power: +18dBm

Receive Sensitivity: -88dBm

Antenna gain

- Stub : +1dBi, Dipole : +3dBi, Dipole : +5dBi, Patch : +9dBi

Configuration

- ParaniWin, ParaniWizard, ParaniUpdater
- Modem AT command set

Diagnostic LED

- TXD, RXD, RTS, CTS, DTR, DSR, DCD on Jig board

Power

- 3.3VDC
- Minimum : 10mA, Maximum : 60mA

Environmental

- Operating temperature : -30°C to 80°C
- Storage temperature : -40°C to 85°C
- Humidity : 90% Non-condensing

Physical properties

- Dimension(L x W x H) :
49 x 23 x 11(mm)
1.93 x 0.9 x 0.43(in.)
- Weight : 6g

MTBF: 400.89 Years


Regulatory Approvals

- FCC Part 15 Subpart C Section 15.247
- EN 60950-1 : 2001
- ETSI EN 300 328
- ETSI EN 301 489-1
- ETSI EN 301 489-17
- MIC(Type Registration)
- TELEC(Type Certification)
- SIG

Warranty: 1-year limited warranty

Parani-ESD1000 Starter Kit

The Parani-ESD1000 Starter Kit includes the evaluation board with the sample circuitry for Parani-ESD1000 interface, power, RS232 interface, H/W Reset, LEDs for users' device development.

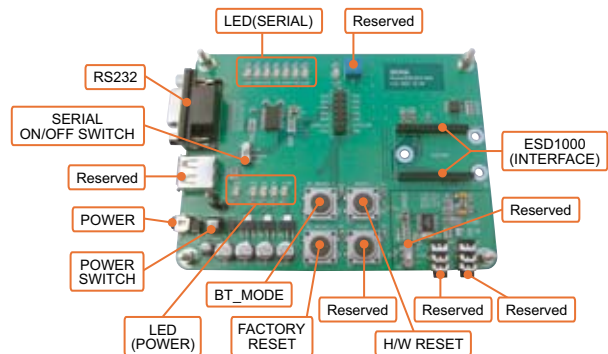

Ordering Information

ESD1000 Parani-ESD1000 OEM Bluetooth-Serial Module-Class1 with antenna extension option

ESD1000-00

Optional Accessories

- SAT-G01R : 1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
- DAT-G01R : 3 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
- DAT5-G01R : 5 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
- PAT-G01R : 9dBi Patch Antenna with RP-SMA Plug Right hand Thread Default Cable.
(SMA Jack Right hand Thread w/o Default Cable)
- SEC-G01R : 15cm Extension Cable(For SAT-G01R / DAT-G01R / DAT5-G01R)
- RFC-G01R : 1m Extension Cable(For PAT-G01R)

ESD1000SK Parani-ESD1000 Starter Kit

Includes

- Parani-ESD1000 Module
- Jig board
- DC Power Adapter
- Serial data cable
- Quick Start Guide
- SAT-G01R : 1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
- CD-ROM

U.S. / Canada / South America

Tel : +1 (408) 573-7425 Fax : +1 (408) 907-3738
 Toll Free (US/Canada): 1-8668-US-SENA (1-866-887-7362)

EU / Africa

Tel : +33 (0) 1 53 53 16 29 Fax : +33 (0) 1 70 24 70 90

Asia / Pacific

Tel : +82-2-571-8283 Fax : +82-2-573-7710

Contact us via E-mail

General Information : info@sena.com
 Sales & Distribution : sales@sena.com
 Technical Support : support@sena.com