

Bluetooth Serial Adapter, Parani™ SD1000



Features


- Bluetooth Specification v2.0 + EDR
- Provides transparent RS232 serial cable replacement
- Basic Transmit Power : Max. +18dBm, EDR Transmit Power : Max. +6dBm
- Receiving Sensitivity : -88dBm(0.1%BER)
- Supports Bluetooth profiles SPP(Serial Port Profile)
- Interoperability with PDA, laptops etc.
- Supports firmware upgrade via windows-based software (ParaniUpdater)
- Working distance (In an open field) : Nom. 100 meters, up to 1000m using patch antenna
- Enhanced portability : standard & extended battery pack options
- Easy to use Windows configuration tool available.
- No external drivers required.

The Parani-SD1000 is a Class1 type of Bluetooth Serial Adapter that supports 100 meters of wireless transmit distance by default. The Parani-SD1000 has an extension option so that users can extend the transmit distance up to 1000 meters using optional antennas. It supports Bluetooth v2.0+EDR specification. Parani-SD1000 has two battery-pack options, standard and extended battery pack. By these options, Parani-SD1000's portability is more enhanced.

Typical application areas of the Parani-SD1000 include :

- RS232 Cable Replacement
- Truck/Bus Monitoring System
- Car Diagnostics
- Wireless POS System
- Wireless Machine(Healthcare/Industrial) Monitoring
- Wireless Factory Monitoring
- PLC Programming
- Wireless Printing
- Wireless Logistics

Panel Layout

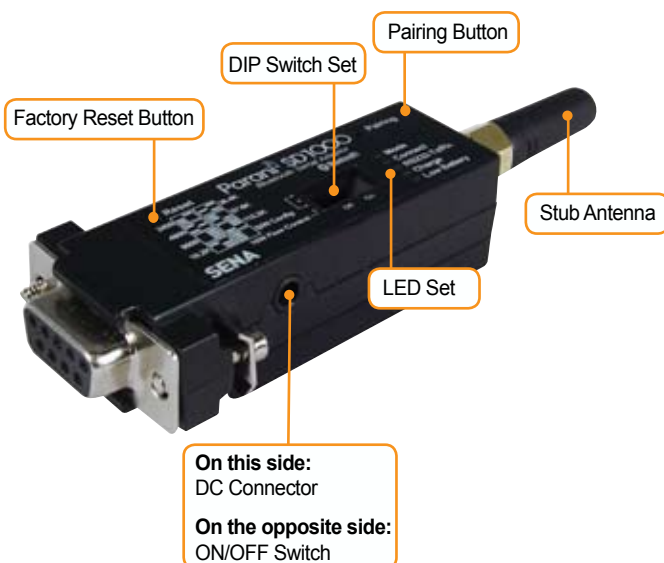

Specifications

Serial Interface

- Serial speed up to 921.6kbps
- CTS/RTS flow control, DTR/DSR for loop-back & full transfer

Bluetooth Interface

- Bluetooth v2.0 + EDR
- Class 1
- Profiles - SPP
- Working distance (in open field)

SAT-G01R	-	SAT-G01R	100 meters
SAT-G01R	-	DAT-G01R	150 meters
DAT-G01R	-	DAT-G01R	200 meters
DAT-G01R	-	DAT5-G01R	300 meters
DAT-G01R	-	PAT-G01R	500 meters
DAT5-G01R	-	DAT5-G01R	400 meters
DAT5-G01R	-	PAT-G01R	600 meters
PAT-G01R	-	PAT-G01R	1,000 meters

[Antennas]

- SAT-G01R : +1dBi Stub Antenna
- DAT-G01R : +3dBi Dipole Antenna
- DAT5-G01R : +5dBi Dipole Antenna
- PAT-G01R : +9dBi Patch Antenna

Max. Tx power : +18dBm

Receive Sensitivity : -88dBm

Configuration

- ParaniWin, ParaniUpdater
- Modem AT command set

Diagnostic LED

- BT Status (mode)
- Connect
- RS232-RX/TX
- Charging/Done (Battery Charging/ Battery Charging completed)
- Low Battery

Power

- Power input : 5~12VDC
- Power Consumption : Minimum 2mA, Maximum 80mA

Battery Pack

- Capacity
 - 240 mAh(standard)
 - 900 mAh(extended)
- Charging Power : minimum 5V/200mA
- Charging Time
 - Approximately 2 hours (standard)
 - Approximately 5 hours (extended)
- Battery life (Test based on 9600 bps data loopback. Actual battery life varies by configuration, operating conditions and other factors)
 - Approximately 4.5 hours (standard)
 - Approximately 16.5 hours (extended)

Environmental

- Operating temperature: -20°C to 70°C
- Storage temperature: -40°C to 85°C
- Humidity: 90% Non-condensing

Physical properties

- Dimension (L x W x H)
 - 76 x 31 x 16 (mm) (No battery pack)
 - 76 x 31 x 19.5 (mm) (with standard battery pack)
 - 76 x 31 x 31.4 (mm) (with extended battery pack)
- Weight
 - 24g (No battery pack)
 - 30g (with standard battery pack)
 - 42g (with extended battery pack)

Certification

- CE, FCC, TELEC, MIC

Warranty

- 3-year limited warranty

Ordering Information

Single Pack SD1000-A1 Includes ✳ Stub antenna NOT included

- SD1000 : SD1000 Bluetooth-serial adapter

Single Pack SD1000-00 Includes

- SD1000 : SD1000 Bluetooth-serial adapter
- DPA-G01 : Parani-DPA DC power cable for SD series
- UPA-G01 : Parani-UPA USB Power Cable
- SAT-G01R : 1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
- FM9GD-G01 : DB9 Female to Male Gender Changer
- CD-ROM

Single Pack SD1000-01 Includes

- Single pack SD1000-00
- OPA-G01 : Parani-OPA External Power Adaptor-International - 4 types: EU, America, UK, Australia

Bulk Pack SD1000-B10 Includes

- SD1000(×10EA) : SD1000 Bluetooth-serial adapter
- SAT-G01R(×10EA) : 1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
- DPA-G01(×10EA) : Parani-DPA DC power cable for SD series

Optional Accessories

- SAT-G01R : 1 dBi Stub Antenna - RP-SMA Plug Right-hand Thread
- DPA-G01 : Parani-DPA DC power cable for SD series
- UPA-G01 : Parani-UPA USB Power Cable
- OPA-G01 : Parani-OPA External Power Adaptor-International - 4 types: EU, America, UK, Australia
- BPC-G02 : Parani-BPC standard Battery Pack for SD1000
- BPC-G03 : Parani-BPC extended Battery Pack for SD1000
- DAT-G01R : 3 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
- DAT5-G01R : 5 dBi Dipole Antenna - RP-SMA Plug Right-hand Thread
- PAT-G01R : 9dBi Patch Antenna with RP-SMA Plug Right hand Thread Default Cable. (SMA Jack Right hand Thread w/o Default Cable)
- SEC-G01R : 15cm Extension Cable(For SAT-G01R / DAT-G01R / DAT5-G01R)
- RFC-G01R : 1m Extension Cable(For PAT-G01R)
- FM9GD -G01 : DB9 Female to Male Gender Changer

For more information, please visit us at <http://www.sena.com>

U.S. / Canada / South America

Tel : +1 (408) 573-7425 Fax: +1 (408) 907-3738
Toll Free (US/Canada): 1-8668-US-SENA (1-866-887-7362)

EU / Africa

Tel : +33 (0) 1 53 53 16 29 Fax: +33 (0) 1 70 24 70 90

Asia / Pacific

Tel : +82-2-571-8283 Fax: +82-2-573-7710

Contact us via E-mail

General Information : info@sena.com
Sales & Distribution : sales@sena.com
Technical Support : support@sena.com